




DIGITAL MULTIMETER KM-9696 SERIES

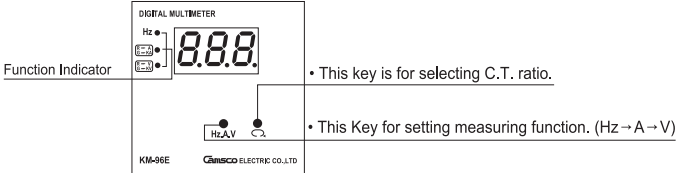

DISPLAY		Red high efficiency LED high 14.22mm (.56")
ACCURACY		$\pm 0.5\% \pm 2$ digit
OPERATING CONDITION		$-10^{\circ}\text{C}\sim 50^{\circ}\text{C}$ (20% to 90% RH non-condensed)
DIELECTRIC STRENGTH		AC 2KV/1min
AUX • POWER		AC110V/220V 50/60Hz
MEASUREMENT RANGE	KM-96A	Ranges: Direct Measurement Current: AC 0 – 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C.T." to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA).
	KM-96V	Range: AC 50-600V.
	KM-96Hz	Frequency: 1-99.9Hz. Input voltage: AC 50-600V.
	KM-96AV	Ranges: Direct Measurement Current: AC 0 – 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C.T." to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V.
	KM-96E	Ranges: Direct Measurement Current: AC 0 – 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C.T." to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V. Frequency: 1-99.9Hz.
STANDARD FEATURES		
DIMENSION	