





SCREW BASE & FUSE

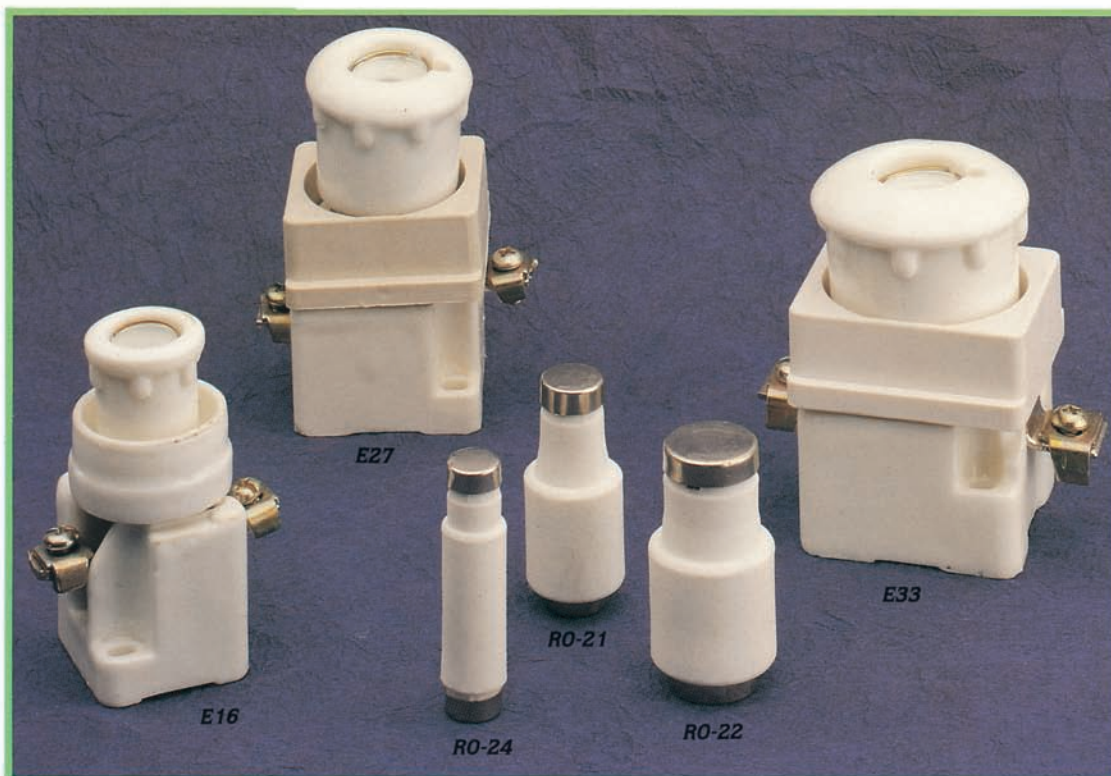

DIMENSION

ITEM NO.	mm	A	B	C	D
RO-21 2-6 A	50	21	13	6	
RO-21 8-10 A	50	21	13	8	
RO-21 16 A	50	21	13	10	
RO-21 20 A	50	21	13	12	
RO-21 25 A	50	21	13	14	
RO-22 35-40 A	50	27	20	16	
RO-22 50 A	50	27	20	18	
RO-22 63 A	50	27	20	20	
RO-24 2 A	50	12.5	11.3	6	
RO-24 4 A	50	12.5	11.3	6	
RO-24 6 A	50	12.5	11.3	6	
RO-24 10 A	50	12.5	11.3	8	
RO-24 16 A	50	12.5	11.3	10	
RO-24 20 A	50	12.5	11.3	12	
RO-24 25 A	50	12.5	11.3	12	

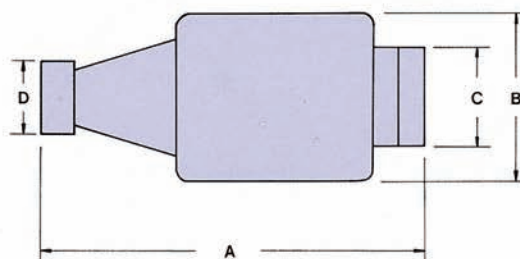

SCREW TYPE	FUSE			BASE		
ITEM NO.	RO-21	RO-22	RO-24	E16	E27	E33
RATED VOLTAGE (V)	500 V	500 V	500 V	500 V	500 V	500 V
RATED CURRENT (A)	2, 4, 6, 8 10, 16, 20 25	35, 40 50, 63	2, 4, 6 10, 16 20, 25	25A	25A	25A
CONNECTED WITH BASE (FUSE)	E27	E33	E16	RO-24	RO-21	RO-22

