




RELAY

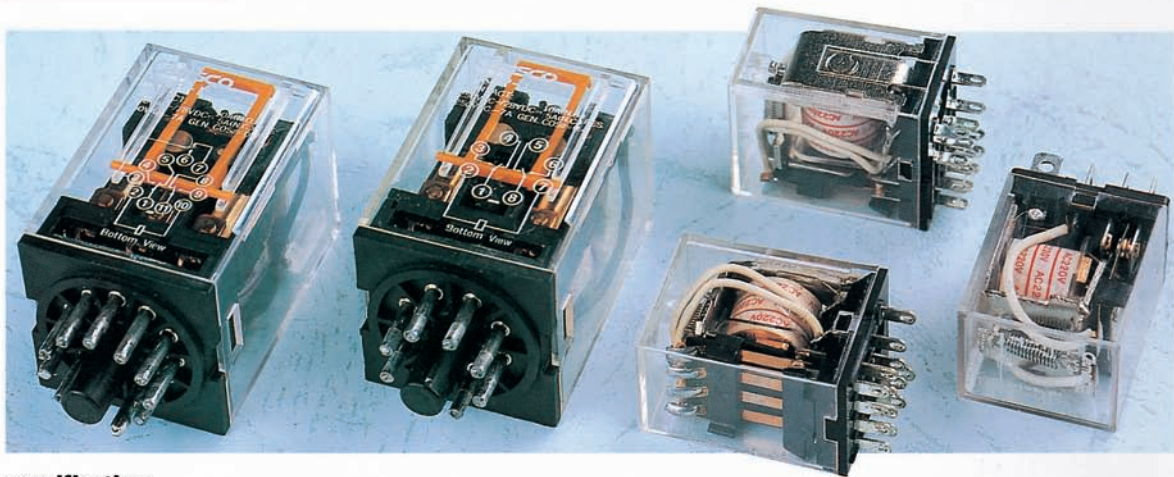

specification

MODEL		MY SERIES			LY SERIES			MK SERIES	
		MY-2	MY-3	MY-4	LY-2	LY-3	LY-4	MK2P-I	MK3P-I
EXTERNAL DIMENSION (mm)	L		27.6		27.6	27.6	27.6	34.7	
	W		21.5		21.5	21.5	41.5	34.7	
	H		34		36	36	36	52	
CONTACT FORM		2A2B	3A3B	4A4B	2A2B	3A3B	4A4B	2A2B	3A3B
CONTACT CAPACITY		28V DC 220V AC			28V DC 220V AC			28V DC 220V AC	
		5A	3A	15A/10A	10A	10A 5A			
COIL VOLTAGE	DC	6,12,24,36,110 V			6,12,24,36,48,110V			6,12,24,48,60,110,220V	
	AC	6,12,24,36,110,220V			6,12,24,36,48,110,220V			6,12,24,36,48,110,127,220,380V	
CONTACT RESISTANCE		≤ 50mΩ			≤ 50mΩ			≤ 50mΩ	
INSULATION RESISTANCE		≥ 1000MΩ			≥ 1000MΩ			≥ 500MΩ	
DIELECTRIC STRENGTH		1000V AC 50/60Hz			1500 AC 50/60 Hz			1500V AC 50/60Hz	
SERVICE LIFE	MECHANICAL	10,000,000			10,000,000			10,000,000	
	ELECTRICAL	100,000			100,000			100,000	
TERMINAL		OUTLET AND PRINTED-CIRCUIT BOARD			OUTLET AND PRINTED-CIRCUIT BOARD			OUTLET SOLDER	

