




TYPE C CONTACTORS & THERMAL OVERLOAD RELAY

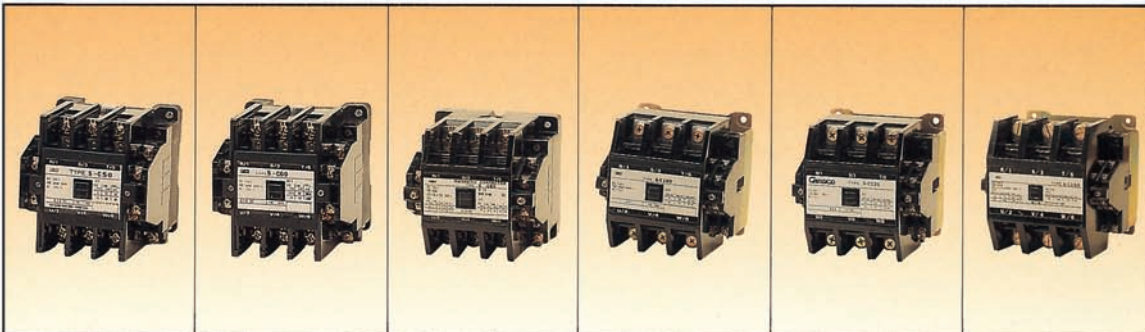

S-C50			S-C60			S-C80			S-C100			S-C125			S-C150		
220	380	440	220	380	440	220	380	440	220	380	440	220	380	440	220	380	440
50	46	46	60	56	56	80	75	75	100	80	80	125	100	100	150	140	140
11	22	22	15	30	30	19	37	37	25	50	50	30	55	55	45	75	75
60			80			120			150			175			200		
2 NO+2 NC			2 NO+2 NC			2 NO+2 NC			2 NO+2 NC			2 NO+2 NC			2 NO+2 NC		
1.2			1.2			2.0			2.8			2.8			4.2		
TH-60 <ul style="list-style-type: none"> 22A (18-26) 30A (24-36) 35A (28-42) 40A (32-48) 56A (45-67) 67A (54-80) 						TH-120 <ul style="list-style-type: none"> 80A (72-96) 105A (80-130) 130A (100-160) 											
S-C50, S-C60, S-C80						S-C100, S-C125, S-C150											
0.38						0.8											