


APPLICATION:

F series AC contactor is applicable to the circuits up to the rated voltage 1000V AC 50Hz or 60Hz, rated current up to 780A, for long distance breaking circuit and frequently starting or controlling the motor. It also can be used for the control of distribution circuits of rated current from 220A to 1600A.

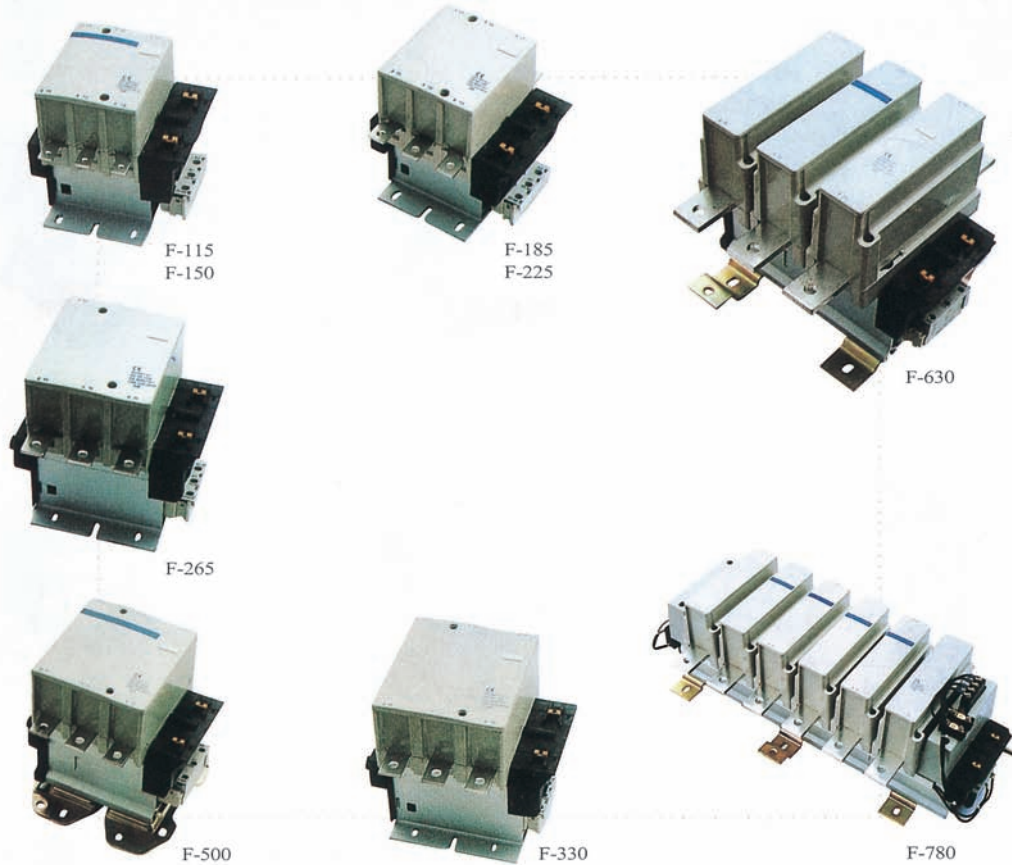

TECHNICAL SPECIFICATION:

Type	F-115	F-150	F-185	F-225	F-265	F-330	F-400	F-500	F-630	F-780	
Rated operation current(A)	AC-1	115	150	185	225	265	330	400	500	630	780
	AC-3	200	250	275	315	350	400	500	700	1000	1600
Standard power ratings of 3-phase motors AC-3(KW)	220V	30	40	55	63	75	100	110	147	200	220
	380V	55	75	90	110	132	160	200	250	335	400
	415V	59	80	100	110	140	180	200	280	375	425
	440V	59	80	100	110	140	200	250	295	400	425
	500V	75	90	110	129	160	200	257	355	400	450
	600V	80	100	110	129	160	200	280	335	450	475
1000V	65	65	100	100	147	160	185	335	450	450	