



CE APPROVAL


# C45 SERIES

C-45 SERIES				
SPECIFICATION				
NUMBER OF POLES	1P	2P	3P	4P
PHOTO				
AMPERE RATING AT AMBIENT TEMPERATURE 40°C	6A, 10A, 16A 20A, 25A, 32A 40A, 50A, 63A	6A, 10A, 16A 20A, 25A, 32A 40A, 50A, 63A	6A, 10A, 16A 20A, 25A, 32A 40A, 50A, 63A	6A, 10A, 16A 20A, 25A, 32A 40A, 50A, 63A
RATED VOLTAGE	240V	415V	415V	415V
INTERRUPTING CAPACITY	6A TO 40A	6KA (240V) 6KA (415V)	6KA (415V)	6KA (415V)
	50A TO 63A	4KA (240V)	4KA (415V)	4KA (415V)


### APPLICATION SCOPE:

C45 used in 50 Hz 240/415V, division capacity accords with BS3871 and IEC 898 standard, used in protecting the short circuit and overload of the circuit, especially suitable for lighting distribution system in industry and commerce. They are the best alternative for the renewal of products.

### PRODUCT GUIDE RAIL INSTALLATION DIMENSIONS.

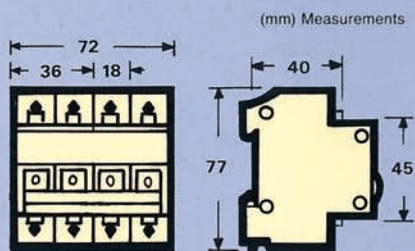

(mm) Size of gixing DIN rail

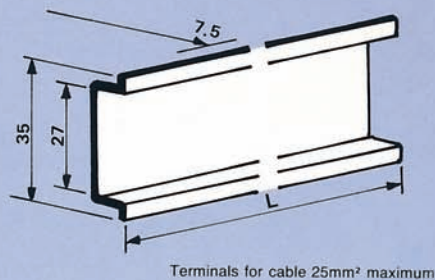

### ACTION CHARACTERISTIC CURVE BS Standard:

