


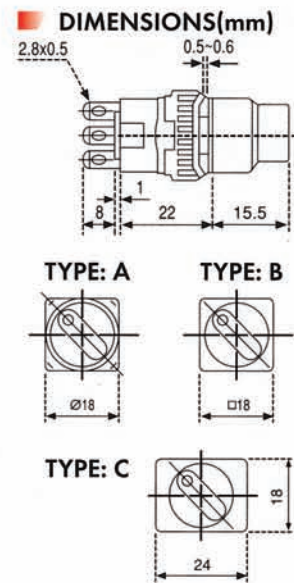




Ø16 CONTROL UNIT



TYPE A 	SPECIFICATIONS	
	SELECTOR SWITCH	
	DESCRIPTION	
	90° 2 POLES	90° 3 POLES
TYPE B 	ITEM NO.	
	LAS16-2	LAS16-3
	CONTACT CONFIGURATION	
	1A1B 1C	2A2B 2C
2A2B 2C		
TYPE C 	MECHANICAL DURABILITY (TIMES)	
	100,000 TIMES	
	ELECTRICAL DURABILITY	
	100,000 TIMES	



TYPE A 	SPECIFICATIONS	
	KEY SWITCH	
	DESCRIPTION	
	90° 2 POLES	90° 3 POLES
TYPE B 	ITEM NO.	
	LAS16-2K	LAS16-3K
	CONTACT CONFIGURATION	
	1A1B 1C	2A2B 2C
2A2B 2C		
TYPE C 	MECHANICAL DURABILITY(TIMES)	
	100,000 TIMES	
	ELECTRICAL DURABILITY	
	100,000 TIMES	

