



CONTROL COMPONENTS




ISO9001: 2000

CONTROL STATION



| Item No. | NUMBER OF POLES FOR C-45N, C60N, MCB F360 ELCB, RT18-32 FUSE BASE |
|----------|---|
| CBX-1 | 1 POLE |
| CBX-2 | 2 POLES |
| CBX-3 | 3 POLES & 4 POLES COMMON USE |

DIMENSIONS

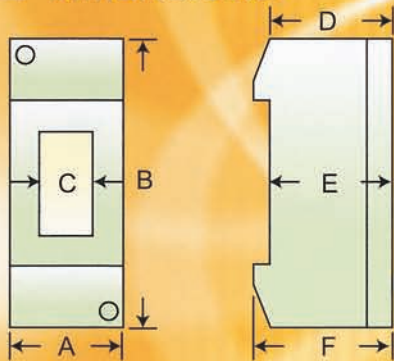

| Item No. | Size | | | | | |
|----------|------|-----|----|----|----|------|
| | A | B | C | D | E | F |
| CBX-1 | 32 | 130 | 18 | 57 | 58 | 60.5 |
| CBX-2 | 51.5 | 130 | 37 | 57 | 58 | 60.5 |
| CBX-3 | 87 | 130 | 54 | 57 | 58 | 60.5 |

PILOT LIGHT AD16-22D/S (LED TYPE)

- FOR BOTH $\phi 22$ AND $\phi 25$ COMMON USE
- VOLTAGE : AC/DV 6V, 12V, 24V, 36V, 48V, 110V
AC 220V, 380V
DC 220V
- COLOR : RED, YELLOW, BLUE, GREEN, WHITE

