




# Copper Tube Terminals

Tin plated electrolytic,  
With cable inspection  
Hole, 1.5 to 1000mm<sup>2</sup>.  
The copper tubing is to bs.  
1172/Sabs. 404/Astmb.

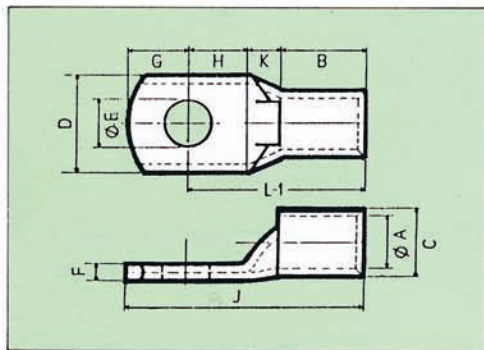

DIMENSIONS

mm

CABLE	STUD HOLD SIZE	DIMENSIONS										ITEM NO.			
		ØE	ØA	C	D	F	G	H	K	B	L-1		J		
1.5	5.2	2.6	4.0	8.0	1.0	4	5	2	5	12	18	C1.5-5			
2.5	4.2	2.6	4.0	8.0	1.0	4	5	2	7	14	20	C2.5-4			
	5.2			10.0	0.8	5	6			15		C2.5-5			
	6.5			10.0	0.8	5	6			15		20	C2.5-6		
4	5.2	3.0	4.5	10.0	1.0	5	6	2	7	15	20	C4-5			
	6.5			10.0	1.0	5	6			15		20	C4-6		
6	5.2	4.0	5.5	10.0	1.2	5	6	3	9	18	23	C6-5			
	6.5			12.0	1.0	6	9			21		C6-6			
	8.4			12.0	1.0	6	9			21		23	C6-8		
10	6.5	4.4	6.0	12.0	1.2	6	7	3	9	19	25	C10-6			
	8.4			12.0	1.2	6	9			21		25	C10-8		
16	6.5	5.4	7.0	12.0	1.4	7	7	4	12	23	30	C16-6			
	8.4			12.0	1.4	7	7			4		12	25	C16-8	
25	6.5	6.7	8.5	13.0	2.0	7	7	4	12	23	32	C25-6			
	8.4			18.0	1.4	10	11			27		C25-8			
	10.5			18.0	1.4	10	11			27		32	C25-10		
35	6.5	8.2	10.5	15.3	2.4	9	9	5	12	26	37	C35-6			
	8.4			18.0	2.0	10	11			28		C35-8			
	10.5			18.0	2.0	10	11			28		37	C35-10		
50	8.4	9.7	12.4	17.8	2.9	10	11	6	16	33	43	C50-8			
	10.5			17.8	2.9	10	11			6		16	33	43	C50-10
70	8.4	11.6	14.6	21.0	3.5	12	13	7	18	38	50	C70-8			
	10.5			21.0	3.5	12	13			7		18	38	50	C70-10
	13			21.0	3.5	12	13			7		18	38	50	C70-12
95	10.5	14.2	17.4	25	3.9	13	13	9	20	42	55	C95-10			
	13			25	3.9	13	13			9		20	42	55	C95-12
120	13	15.0	19.0	28	4.4	14	14	10	22	46	62	C120-12			
	17			28	4.4	16	16			10		22	46	62	C120-16
150	13	17.0	21.0	30	4.7	16	16	11	26	53	70	C150-12			
	17			30	4.7	16	16			11		26	53	70	C150-16
185	17	19.0	23.5	34	5	17	17	12	32	61	75	C185-16			
240	17	21.5	26.5	38	5.5	20	20	14	38	72	90	C240-16			
	21			38	5.5	20	20			14		38	72	90	C240-20
300	17	24.0	30.0	43	6.5	22	22	15	42	79	100	C300-16			
	21			43	6.5	22	22			15		42	79	100	C300-20
400	17	29.5	36.5	50.1	8	26	26	18	44	88	110	C400-16			
	21			50.1	8	26	26			18		44	88	110	C400-20
500	17	31.0	38.5	56	9	28	28	20	48	96	120	C500-16			
	21			56	9	28	28			20		48	96	120	C500-20
630	21	35.5	43.5	65	10	33	33	22	56	111	130	C630-20			
800	—	39	50.6	73.5	11.6	—	—	17	78	—	170	C800-BL			
1000	—	43	56.2	81	13.2	—	—	20	90	—	200	C1000-BL			

