




SPLIT BOLT CONNECTORS BS SERIES

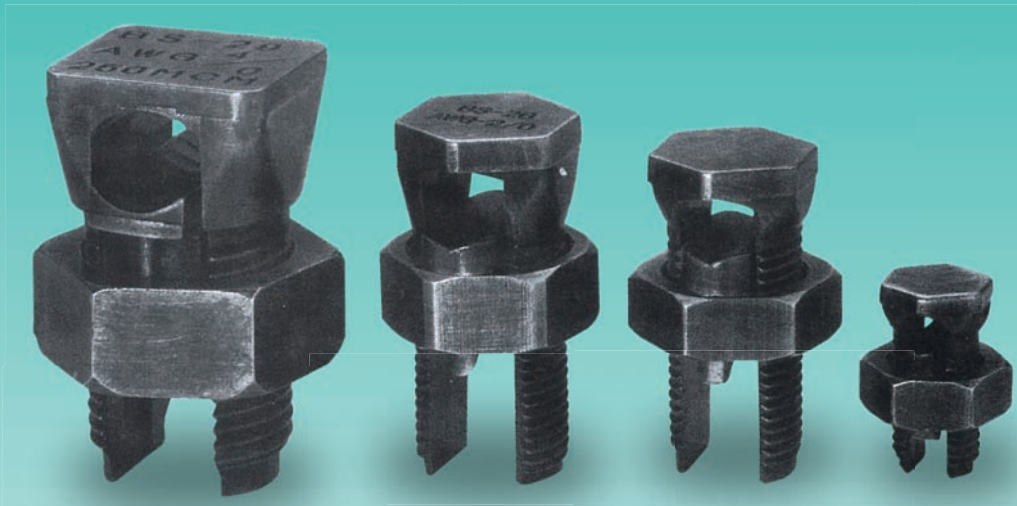

Compact high strength, high copper alloy connectors split-bolt has free-running threads and easy to grip wrench flats. Highly resistant to season cracking and

corrosion, the connectors provides maximum pressure and assures a secure connection on all combinations of run and tap conductors.

■ SPECIFICATIONS:

CATALOG NUMBER	CONDUCTOR						RECOMMENDED TIGHTENING TORQUE IN.LB.
	COPPER		COPPERWELD				
	RANGE FOR EQUAL RUN AND TAP	MIN.TAP WITH MAX.RUN	MAXMUM RUN AND TAP				
			SOL	STR.	TYPE A	TYPE D	
BS90	12 STR.-10 STR.	16 STR.	—	—	—	—	80
BS15	10 STR.-8 STR.	14 STR.	#8	—	—	—	
BS17	8 STR.-6 SOL.	14 STR.	#6	3#12	8A	9 1/2 D	165
BS17-3	8 STR.-6 SOL.	16 STR.	#6	3#12	8A	9 1/2 D	
BS20	8 STR.-4 SOL.	14 STR.	#4	3#10	6A	8D	
BS20-3	8 STR.-4 SOL.	14 STR.	#4	3#10	6A	8D	
BS22	6 STR.-2 SOL.	14 STR.	#2	3#8	4A	6D	275
BS22-3	6 STR.-2 SOL.	14 STR.	#2	3#8	4A	6D	
BS23	6 STR.-2 STR.	14 STR.	#1	3#7	3A	5D	385
BS25	4 STR.-1/0 STR.	14 STR.	2/0	3#5	2A	4D	
BS26	2 STR.-2/0 STR.	14 STR.	3/0	7#7	—	—	500
BS27	1 STR.-3/0 STR.	8 SOL.	—	—	—	—	
BS29	1 STR.-250	8 STR.	4/0	7#5	—	—	650
BS31	1/0 STR.-350	1/0 STR.	—	19#8	—	—	
BS34	2/0 STR.-350	2/0 STR.	—	19#6	—	—	825
BS39	4/0 STR.-350	4/0 STR.	—	19#5	—	—	1000
BS44	300-1000	4/0 STR.	—	—	—	—	1100