




WIRING DUCT (OPEN SLOT)

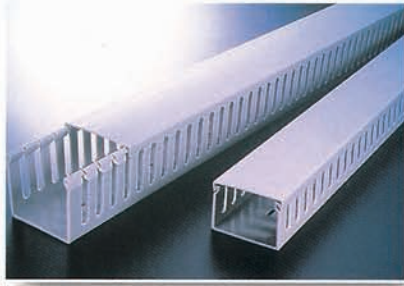


SLOT: 8mm for all applicable size except MD-6.5 MD-6.7, MD-8 in 10mm. (100mm in high)


- Material: High impact, self-extinguishing, warp-proof PVC (Polyvinyl chloride)
- Color: Grey.
- Maximum service temperature:85°C
- Used extensively for all wiring applications where cable protection is essential i.e. switchboards...etc.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.
- ★ NEW SIZE

Unit:mm

MD SLOT : 8mm

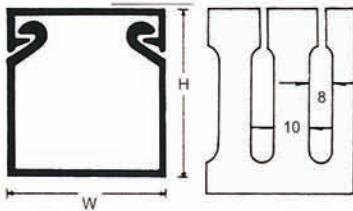


KD SLOT : 6mm

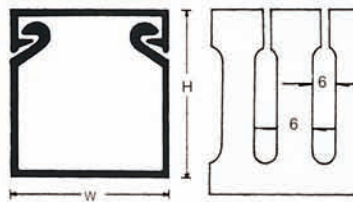

HD SLOT : 4mm

■ AVAILABLE AT 6mm SLOT UPON REQUEST.UP TO 60×60 mm.


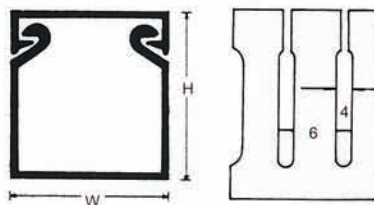


SLOT : 8mm	SLOT : 6mm	SLOT : 4mm	Dimension		Wires to be Contained	Length
			W×H			
AD-0.5L		HD-0.5L	15×25		5~12pcs	2M
AD-0.7L		HD-0.7L	20×20		5~12pcs	
AD-0L		HD-0L	25×25		10~25pcs	
AD-1L	KD-1	HD-1L	25×45		20~25pcs	
AD-1.2L	KD-1.2	HD-1.2L	33×33		25~45pcs	
AD-1.5L	KD-1.5	HD-1.5L	33×45		40~55pcs	
AD-2L	KD-2	HD-2L	45×45		60~70pcs	
AD-2.2L		HD-2.2L	50×50		80~90pcs	
AD-2.5L	KD-2.5	HD-2.5L	65×45		110~120pcs	
AD-3L	KD-3	HD-3L	33×65		60~75pcs	
AD-4L	KD-4	HD-4L	25×65		40~45pcs	
AD-5L	KD-5	HD-5L	45×65		110~120pcs	
AD-5.5L	KD-5.5	HD-5.5L	60×60		120~135pcs	
AD-5.7L	KD-5.7	HD-5.7L	65×65		180~200pcs	
AD-6L			72×64		200~220pcs	
AD-6.5L			33×100		180~200pcs	
AD-6.7L			48×100		215~250pcs	
★ AD-6.8L			55×100		220~260pcs	
AD-7L			70×100		250~300pcs	
★ AD-7.2L			100×50		200~250pcs	
AD-7.5L			100×75		260~320pcs	
AD-8L		HD-8L	100×100		300~400pcs	
AD-10L			150×75		335~500pcs	
★ AD-12L			150×100		450~600pcs	
★ AD-15L			200×100		600~800pcs	

FIXING SLOT

For width :
25mm · 33mm · 40mm · 45mm ·
50mm · 60mm · 65mm

For width :
72mm · 80mm · 100mm · 150mm




■ AVAILABLE AT 50mm SLOT UPON REQUEST.




WIRING DUCT (OPEN SLOT)




Unit:mm

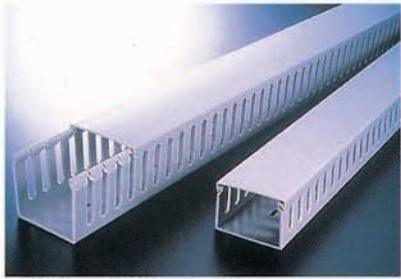

VD SLOT : 8mm

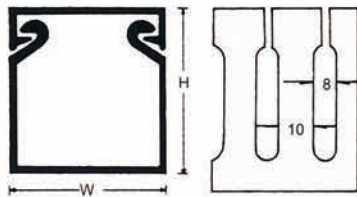

HVD SLOT : 4mm

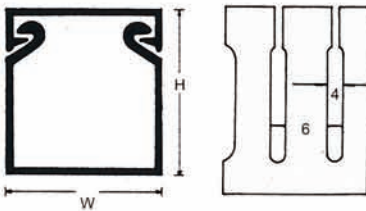


Item No.		W×H	Wires to be Contained	Length
SLOT 8mm	SLOT 4mm			
VD-1	HVD-1	25×30	15~25pcs	2M
VD-2	HVD-2	25×40	20~25pcs	
VD-3	HVD-3	33×40	40~45pcs	
VD-4	HVD-4	40×40	60~70pcs	
VD-5	HVD-5	60×40	100~115pcs	
VD-5.5	HVD-5.5	80×40	120~135pcs	
★ VD-5.7	HVD-5.7	100×40	130~175pcs	
VD-6	HVD-6	25×60	40~45pcs	
VD-7	HVD-7	40×60	100~115pcs	
VD-8	HVD-8	60×60	120~135pcs	
VD-9	HVD-9	80×60	180~210pcs	
VD-9.5	HVD-9.5	100×60	240~290pcs	
VD-9.6	HVD-9.6	120×60	240~290pcs	
VD-9.65	HVD-9.65	120×65	260~360pcs	
VD-9.66	HVD-9.66	25×80	100~120pcs	
VD-9.7	HVD-9.7	40×80	120~135pcs	
VD-9.8	HVD-9.8	60×80	180~210pcs	
VD-10	HVD-10	80×80	240~290pcs	
VD-10.5	HVD-10.5	100×80	260~350pcs	
VD-11	HVD-11	120×80	300~400pcs	
★ VD-12	HVD-12	40×100	130~175pcs	


★ NEW SIZE

WIRING DUCT (CLOSE SLOT)

Unit:mm

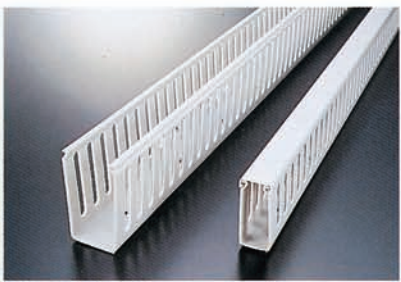

VDC SLOT : 8mm


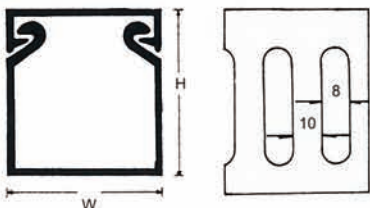


Item No.	W×H	Wires to be Contained	Length
SLOT 8mm			
VDC-2530	25×30	15~25pcs	2M
VDC-2560	25×60	40~45pcs	
VDC-4040	40×40	60~70pcs	
VDC-4060	40×60	100~115pcs	
VDC-4080	40×80	120~135pcs	
VDC-5050	50×50	80~90pcs	
VDC-6060	60×60	120~135pcs	
VDC-6080	60×80	180~210pcs	
VDC-8080	80×80	240~290pcs	
VDC-100100	100×100	300~400pcs	

- Close slot design facilitate easy installation or removal of cover.
- Cut optionally wherever wire insertion/extension is necessary.





WIRING DUCT (OPEN SLOT)

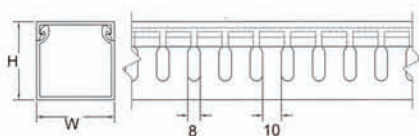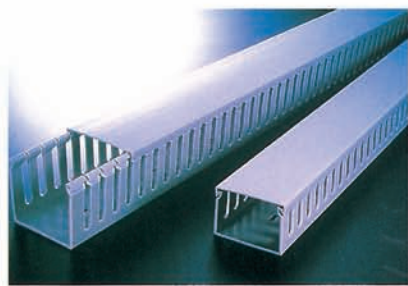Item No.		W×H	Wires to be Contained	Unit:mm	
Slot(8mm)	Solid			Length	
AD-1×2	SD-1×2	25×50	20~25pcs	2M	
AD-1×3	SD-1×3	25×75	60~75pcs		
AD-1.5×1	SD-1.5×1	38×25	20~23pcs		
AD-1.5×2	SD-1.5×2	38×50	60~70pcs		
AD-2×2	SD-2×2	50×50	80~90pcs		
AD-2×3	SD-2×3	50×75	180~200pcs		
AD-3×3	SD-3×3	75×75	200~250pcs		
AD-3×4	SD-3×4	75×100	240~300pcs		

- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85℃
- Features parallel holes on both sidewalls to facilitate cutting in wire application.


DUCT (OPEN SLOT)

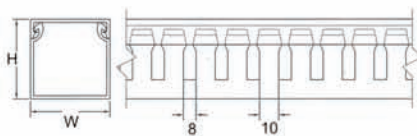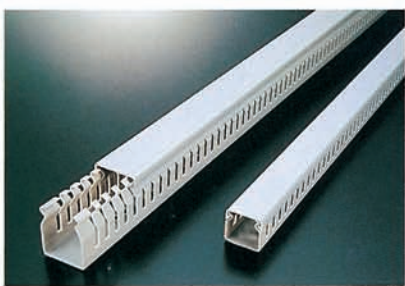


Item No.	W×H	Wires to be Contained	Unit:mm	
Slot (4mm)	Length			
BD-2525	25×25	10~25pcs	2M	
BD-3340	33×40	40~45pcs		
BD-4040	40×40	50~60pcs		
BD-3360	33×60	60~70pcs		
BD-4860	48×60	110~120pcs		
BD-6060	60×60	120~135pcs		

- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85℃
- Features parallel holes on both sidewalls to facilitate cutting in wire application.

MINI TRUNKING

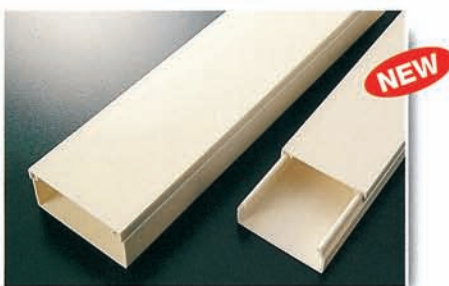

Item No.	W×H	Wires to be Contained	Unit:mm	
Length				
UD-1616	16×16	3~10 pcs	2M	
UD-1809	18×9	2~6 pcs		
UD-2516	25×16	5~12 pcs		
UD-4025	40×25	20~40 pcs		
UD-5025	50×25	25~45 pcs		

Gamsco**DUCT (SOLID)****Gamsco****SOLID:**

No slot design, for external wiring or where wire extraction is not necessary.

- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85°C
- Used extensively for all wiring applications where cable protection is essential i.e. switchboard...etc.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.
- ★ NEW SIZE

Unit:mm

Item No.	W×H	Wires to be Contained	Length
★ SD-2210	22×10	3~8pcs	
★ SD-3015	30×15	10~25pcs	
SD-1616	16×16	3~10pcs	
SD-2516	25×16	5~12pcs	
SD-3816	38×16	12~30pcs	
SD-2020	20×20	5~12pcs	
★ SD-4020	40×20	20~40pcs	
SD-1525	15×25	5~12pcs	
SD-2525	25×25	10~25pcs	
SD-3825	38×25	20~40pcs	
★ SD-5025	50×25	25~45pcs	
SD-2530	25×30	15~25pcs	
★ SD-3030	30×30	20~40pcs	
SD-3333	33×33	25~45pcs	
★ SD-10033	100×33	180~200pcs	
SD-2540	25×40	20~25pcs	
SD-3340	33×40	40~45pcs	
SD-4040	40×40	60~70pcs	
SD-6040	60×40	100~115pcs	
SD-7540	75×40	120~135pcs	
★ SD-8040	80×40	120~135pcs	
★ SD-10040	100×40	180~200pcs	
SD-2545	25×45	20~25pcs	
SD-3345	33×45	40~55pcs	
SD-4545	45×45	60~70pcs	
SD-6545	65×45	110~120pcs	
★ SD-2550	25×50	20~30pcs	
★ SD-3850	38×50	20~35pcs	
SD-5050	50×50	80~90pcs	
★ SD-7550	75×50	180~200pcs	
★ SD-10050	100×50	200~250pcs	
SD-2560	25×60	40~45pcs	
SD-4060	40×60	100~115pcs	
SD-6060	60×60	120~135pcs	
SD-8060	80×60	180~210pcs	
SD-10060	100×60	240~290pcs	
★ SD-12060	120×60	240~290pcs	
SD-7264	72×64	200~220pcs	
SD-2565	25×65	40~45pcs	
SD-3365	33×65	60~75pcs	
SD-4565	45×65	110~120pcs	
SD-6565	65×65	180~200pcs	
★ SD-12065	120×65	260~350pcs	
★ SD-2575	25×75	50~55pcs	
★ SD-5075	50×75	180~200pcs	
★ SD-7575	75×75	200~250pcs	
SD-10075	100×75	260~320pcs	
SD-15075	150×75	335~500pcs	
★ SD-2580	25×80	60~75pcs	
SD-4080	40×80	120~135pcs	
SD-6080	60×80	180~210pcs	
SD-8080	80×80	240~290pcs	
★ SD-10080	100×80	260~350pcs	
SD-12080	120×80	300~400pcs	
SD-33100	33×100	180~200pcs	
★ SD-40100	40×100	130~175pcs	
SD-48100	48×100	215~250pcs	
★ SD-55100	55×100	220~260pcs	
SD-70100	70×100	250~300pcs	
★ SD-75100	75×100	260~300pcs	
SD-100100	100×100	300~400pcs	
★ SD-150100	150×100	450~600pcs	
★ SD-200100	200×100	600~800pcs	
★ SD-200150	200×150	1040~1200pcs	
★ SD-200200	200×200	1200~1600pcs	

2M




WIRING RETAINER



Unit:mm

Item No.	W×H	Packing
LS-6565	65 × 65	100pcs
LS-7040	70 × 40	


WIRING DUCT

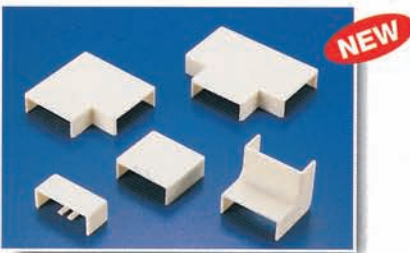


Unit:mm

Item No.	Length	W	W1	W2	W3	H
WD-2010-2	2M	20.0	7.5	7.5		10.3
WD-3010-2		30.0	12.5	12.5		11.2
WD-4010-3		40.0	11	11.5	11.5	10.3
WD-5020-3		50.8	14.8	10	14.8	20.3
WD-10040-3		100	32.8	23.2	32.8	40
WD-11060		111	43.3	16	43.3	61.4


- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85°C
- Features parallel holes on both sidewalls to facilitate cutting in wire application.




WD-2010-2
WD-3010-2

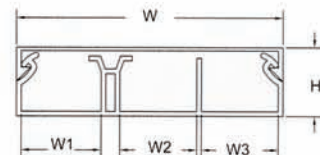

WD-4010-3

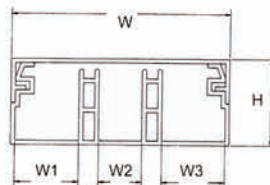

WD-5020-3

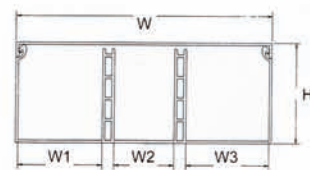


WD-10040-3



DECORATION WIRING DUCT



- Material: Rigid, self-extinguishing PVC
- Standard Color: Grey.
(Milk, white, brown available upon request to meet your color system.)
- Feature: All sizes feature same height in 11mm which were specially designed for flat cables.
- Application: Used extensively for electric wire application of indoor decoration or outdoor security, alarm system.



Unit:mm

Item No.	W	H	Wire to be Contained	Length
TF-1	12.7 (1/2")	11	1-4	2M
TF-2	19.0 (3/4")	11	2-6	
TF-3	25.4 (1")	11	5-9	
TF-4	31.8 (1 1/4")	11	6-12	
TF-5	38.1 (1 1/2")	11	10-18	
TF-6	50.8 (2")	11	15-25	
TF-11	12.7 (1/2")	11	1-4	1M
TF-11C				
TF-11B				
TF-11W				
TF-11M				
TF-21	19.0 (3/4")	11	2-6	
TF-21C				
TF-21B				
TF-21W				
TF-21M				
TF-31	25.4 (1")	11	5-9	
TF-31C				
TF-31B				
TF-31W				
TF-31M				
TF-41	31.8 (1 1/4")	11	6-12	
TF-51	38.1 (1 1/2")	11	10-18	
TF-61	50.8 (2")	11	15-25	

DECORATION WIRING DUCT CONNECTOR



Connectors	Type	Item No.	Used With	Packing	Standard Color
	MID-WAY CONNECTOR	TFM-1	TF-1	20pcs	Grey For Color Add Code To Item No. i.e. TFT-2M M:Milk W:White B:Brown C:Coffee (Light Brown)
		TFM-2	TF-2		
		TFM-3	TF-3		
		TFM-4	TF-4		
	"T" TYPE	TFT-1	TF-1		
		TFT-2	TF-2		
		TFT-3	TF-3		
		TFT-4	TF-4		
	INSIED CORNOR	TFI-1	TF-1		
		TFI-2	TF-2		
		TFI-3	TF-3		
		TFI-4	TF-4		


Connectors	Type	Item No.	Used With	Packing	Standard Color
	OUTSIDE CORNOR	TFO-1	TF-1	20pcs	Grey For Color Add Code To Item No. i.e. TFT-2M M:Milk W:White B:Brown C:Coffee (Light Brown)
		TFO-2	TF-2		
		TFO-3	TF-3		
		TFO-4	TF-4		
	"L" TYPE	TFL-1	TF-1		
		TFL-2	TF-2		
		TFL-3	TF-3		
		TFL-4	TF-4		
	END PIECE	TFE-1	TF-1		
		TFE-2	TF-2		
		TFE-3	TF-3		
		TFE-4	TF-4		



ONE PIECE WIRING DUCT




Unit:mm			
Item No.	Length	W	H
TF-0905	2M	9.2	2.9
TF-1313	2M	13.2	10.8

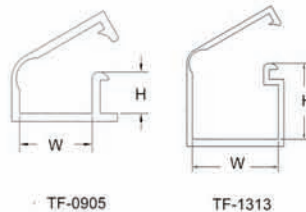

- Material: Rigid, self-extinguishing PVC .Temperature endurance up to 85°C.
- One piece design. Combines duct base together with its lip. Easy for application and save work time.

TELEPHONE WIRING DUCT (SELF-ADHESIVE)

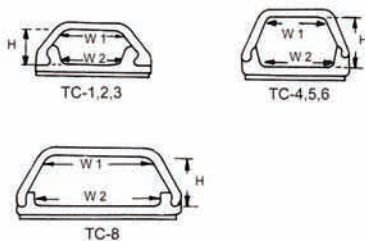

- Material: Rigid, self-extinguishing PVC Backed with high quality self-adhesive tape to facilitate wire application.
- Color: Grey. (Milk, white, brown available on request)
- Length: 1M (2M available upon request)
- Application: Designed to protect wire on floor
- ★ NEW SIZE

Unit:mm					
Item No.	W1	W2	H1	Wire to be Contained	Length
TC-1					1M
TC-1C					
TC-1B	6	7	4	1pcs	
TC-1W					
TC-1M					
★ TC-1.5					1~2pcs
★ TC-1.5C	6	8	7.4		
★ TC-1.5M					
TC-2					2~3pcs
TC-2C					
TC-2B	8	8	6		
TC-2W					
TC-2M					
TC-3					3~4pcs
TC-3C					
TC-3B	10	10	7		
TC-3W					
TC-3M					
TC-4					4~7pcs
TC-4C					
TC-4B	12	15	10		
TC-4W					
TC-4M					
TC-5					7~9pcs
TC-5C					
TC-5B	10	17	13		
TC-5W					
TC-5M					
TC-6					10~15pcs
TC-6C					
TC-6B	11	19	16		
TC-6W					
TC-6M					
TC-8					30~40pcs
★ TC-8C	30	37	16		
★ TC-8M					



TELEPHONE WIRING DUCT CONNECTOR




Unit:mm

Connectors	Type	Item No.	Used With	Packing	Standard Color
	MID-WAY CONNECTOR	TCM-2	TC-2	20pcs	Grey For Color Add Code To Item No. i.e. TFT-2M
		TCM-3	TC-3		
		TCM-4	TC-4		
		TCM-5	TC-5		
		TCM-6	TC-6		
			"T" TYPE		
TCT-3	TC-3				
TCT-4	TC-4				
TCT-5	TC-5				
TCT-6	TC-6				
	INSIDE CORNOR			TCI-2	TC-2
		TCI-3	TC-3		
		TCI-4	TC-4		
		TCI-5	TC-5		
		TCI-6	TC-6		

Connectors	Type	Item No.	Used With	Packing	Standard Color
	OUTSIDE CORNOR	TCO-2	TC-2	20pcs	Grey For Color Add Code To Item No. i.e. TFT-2M
		TCO-3	TC-3		
		TCO-4	TC-4		
		TCO-5	TC-5		
		TCO-6	TC-6		
			"L" TYPE		
TCL-3	TC-3				
TCL-4	TC-4				
TCL-5	TC-5				
TCL-6	TC-6				
	END PIECE			TCE-2	TC-2
		TCE-3	TC-3		
		TCE-4	TC-4		
		TCE-5	TC-5		
		TCE-6	TC-6		

TELEPHONE WIRING DUCT (SELF-ADHESIVE)

Unit:mm

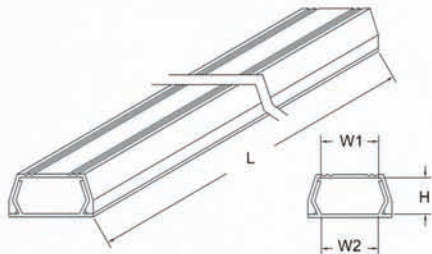

Item No.	W1	W2	H	Overall Length
JD-1	10.4	8.6	8.0	1M
JD-1C				
JD-1M				
JD-2	14.5	11.5	8.0	
JD-2C				
JD-2M				
JD-3	18.8	16.4	10.8	
JD-3C				
JD-3M				
JD-4	23.5	19.5	12.2	
JD-4C				
JD-4M				

- Material: Rigid, self-extinguishing PVC Backed with high quality self-adhesive tape to facilitate wire application.
- Color: Grey. (Milk, white, brown available on request)
- Length: 1M (2M available upon request)
- Application: Designed to protect wire on floor)




ROUND INSULATING CONDUIT



● Material:PVC (white)

Item No.	D	D1	Unit:mm
			L
OD-20	16.2	20	2M
OD-25	21	25	




OVAL INSULATING CONDUIT




● Material:PVC (white)



Item No.	W	H	Unit:mm
			L
OV-13	11.0	5.9	2M
OV-16	14.9	7.9	
OV-20	20.6	9.8	
OV-25	25.2	11.8	



WIRING DUCT

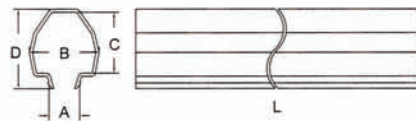


Item No.	A	B	C	D	Unit:mm
					L
EX-1	10.9	24.8	21.6	28.2	2M

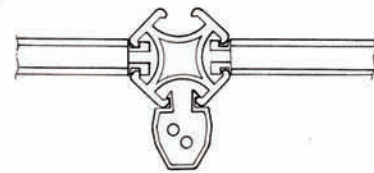




ROUND TYPE WIRING DUCT

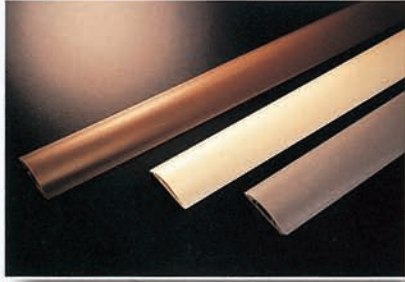

- Material: High impact, rigid, self-extinguish PVC
- Service temperature: 85°C
- Color: Grey. (white, milk, brown, dark brown available)
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.

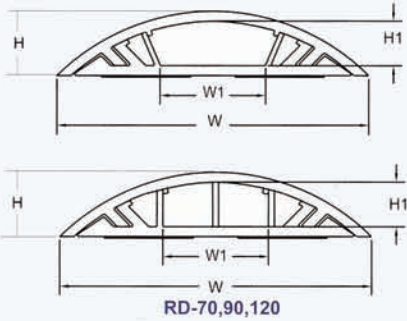

Unit:mm

Item No.	W	W1	H	H1	Length
RD-20	20	8	6	4	1M
RD-20C					
RD-20M					
RD-30	30	11	8	6	
RD-30C					
RD-30M					
RD-40	40	16	9.5	7	
RD-40C					
RD-40M					
RD-50	50	20	11	8	
RD-50C					
RD-50M					
RD-60	60	30	13	9	
RD-60C					
RD-60M					
RD-70	70	40	15	10	
RD-70C					
RD-70M					
★ RD-90	90	45	19	15	
★ RD-90C					
★ RD-90M					
★ RD-120	120	70	25	21	
★ RD-120C					
★ RD-120M					

★ NEW SIZE

WIRING DUCT CUTTER



Item No. : WT-1

