



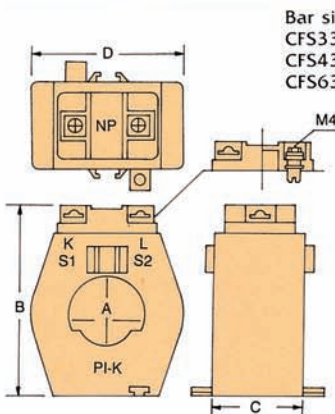

## MULTI-MOUNT CURRENT COIL

- This is a special design can use simply to connect with bus bar and cable.
- Special design of Mounting brackets can shrink into its body.
- Rated Load: 2.5VA, 5VA, 15VA
- Maximum Voltage: 600V
- Frequency: 50/60Hz

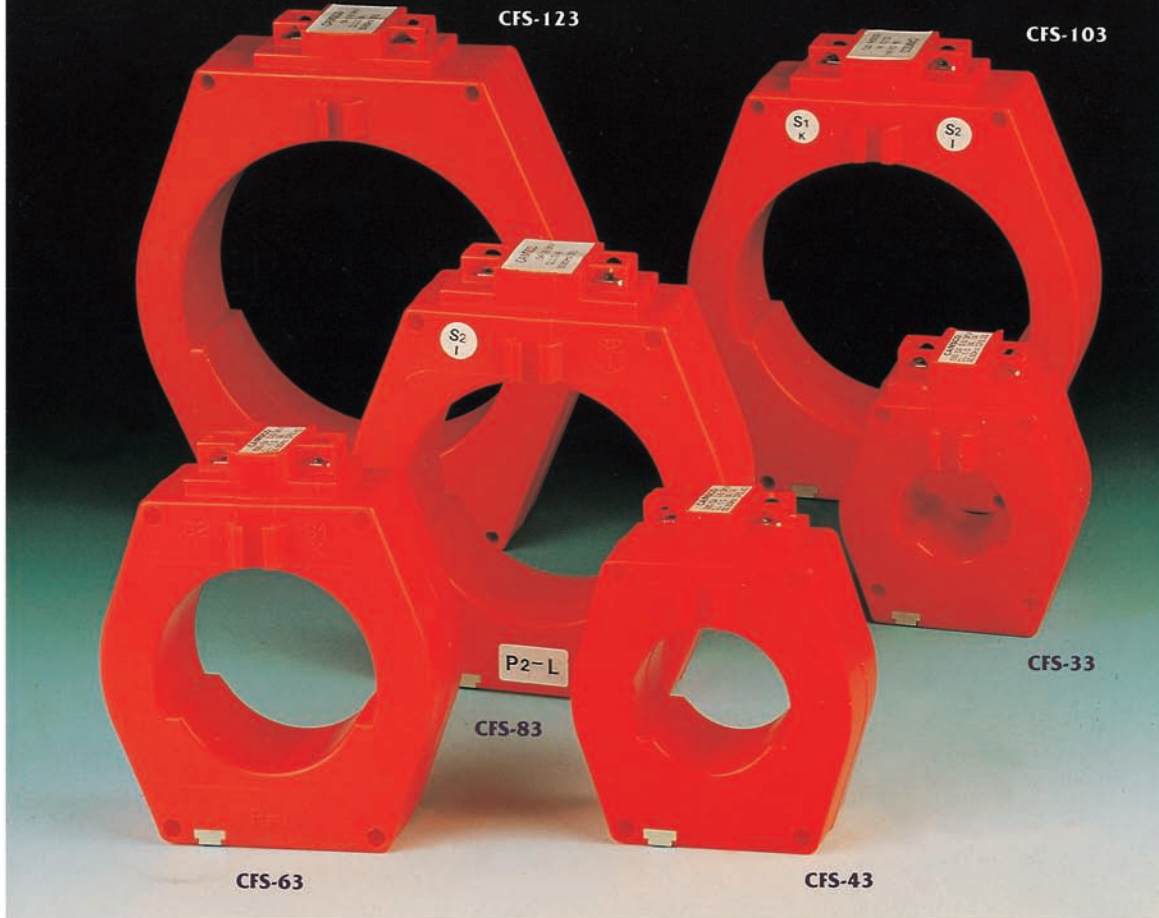

Bar sizes  
 CFS33-30mm    CFS83-80mm  
 CFS43-40mm    CFS103-100mm  
 CFS63-60mm    CFS123-120mm

RATIO	CAPACITY
30/5 ~ 100/5	2.5VA
150/5 ~ 400/5	5VA
500/5 ~ 800/5	10VA
2000/5 ~ 4000/5	15VA

FORM OF CURRENT COIL						m.m.
DIM	CFS33	CFS43	CFS63	CS83	CFS103	CFS123
A	33	43	63	83	103	123
B	96	104	124	147	156	192
C	44	44	44	44	44	44
D	75	82	101	125	141	161

MODEL: CFS-33      MODEL: CFS-83  
 RATIO: 30/5 ~ 200/5    RATIO: 1000/5 ~ 1500/5  
 MODEL: CFS-43      MODEL: CFS-103  
 RATIO: 200/5 ~ 400/5    RATIO: 2000/5 ~ 3000/5  
 MODEL: CFS-63      MODEL: CFS-123  
 RATIO: 500/5 ~ 800/5    RATIO: 3000/5 ~ 4000/5

