





TYPE C DIRECT-ON-LINE MOTOR STARTERS

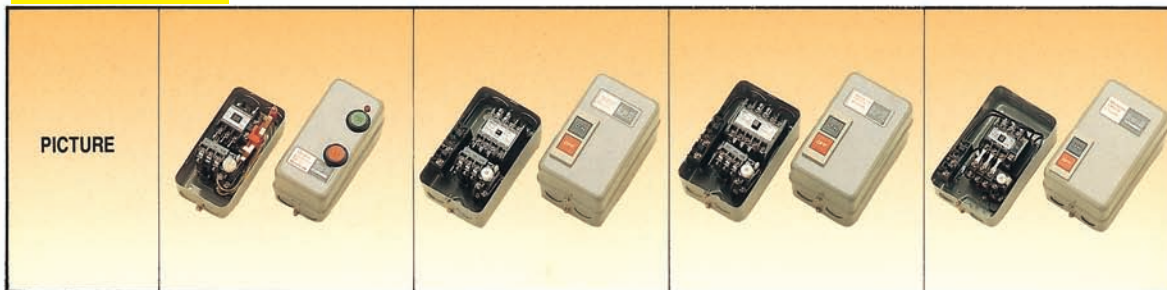


| ITEM NO. | | MY-C10-PB | | MY-C11-PB | | MY-C12-PB | | MY-C16-PB | |
|-------------------------|---------------------------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|
| 3 ϕ MOTOR CAPACITY | 220V | 2.2 KW | 3 HP | 2.2 KW | 3 HP | 2.2 KW | 3 HP | 3.7 KW | 5 HP |
| | 380V | 4 KW | 5.5HP | 4 KW | 5.5HP | 4 KW | 5.5HP | 5.5 KW | 7.5HP |
| | 440V | 4 KW | 5.5HP | 4 KW | 5.5HP | 4 KW | 5.5HP | 5.5 KW | 7.5HP |
| 1 ϕ MOTOR CAPACITY | 110V | 0.4 KW | 0.5HP | 0.4 KW | 0.5HP | 0.4 KW | 0.5HP | 0.75KW | 1 HP |
| | 220V | 0.75KW | 1 HP | 0.75KW | 1 HP | 0.75KW | 1 HP | 1.5 KW | 2 HP |
| COMPOUND UNIT | CON-TACTOR OVERLOAD RELAY | S-C10 | | S-C11 | | S-C12 | | S-C16 | |
| | | TH-12 | | TH-12 | | TH-20 | | TH-20 | |
| WEIGHT (kg) | | 0.7 | | 0.9 | | 1.0 | | 1.2 | |

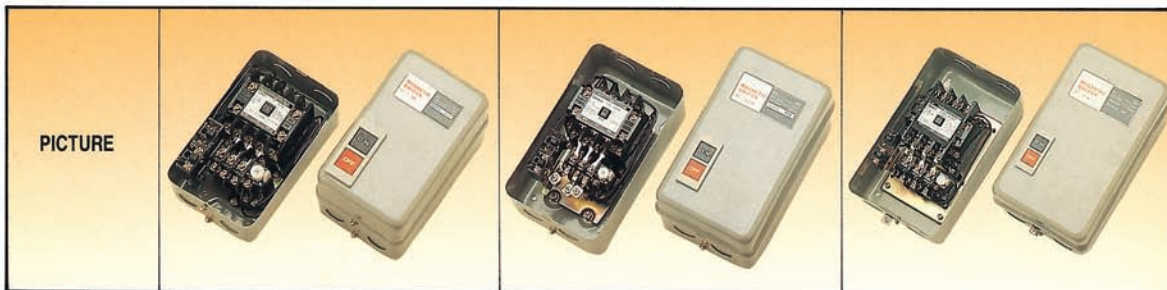

| ITEM NO. | | MY-C21-PB | | MY-C35-PB | | MY-C50-PB | |
|-------------------------|---------------------------|-----------|-------|-----------|------|-----------|------|
| 3 ϕ MOTOR CAPACITY | 220V | 5.5KW | 2.5HP | 9 KW | 12HP | 11KW | 15HP |
| | 380V | 11 KW | 15 HP | 15 KW | 20HP | 22KW | 30HP |
| | 440V | 11 KW | 15 HP | 15 KW | 20HP | 22KW | 30HP |
| 1 ϕ MOTOR CAPACITY | 110V | 1.1KW | 1.5HP | 1.5KW | 2HP | | |
| | 220V | 2.2KW | 3 HP | 3.7KW | 5HP | | |
| COMPOUND UNIT | CON-TACTOR OVERLOAD RELAY | S-C21 | | S-C35 | | S-C50 | |
| | | TH-20 | | TH-20T | | TH-60 | |
| WEIGHT (kg) | | 1.4 | | 2.3 | | 3.45 | |

Dimensions in mm



| ITEM NO. | DIM. | L | W | H | D |
|-----------|------|-----|-----|-----|-----|
| MY-C10-PB | | 140 | 70 | 85 | 45 |
| MY-C11-PB | | 145 | 92 | 105 | 65 |
| MY-C12-PB | | 145 | 92 | 105 | 65 |
| MY-C16-PB | | 175 | 105 | 120 | 75 |
| MY-C21-PB | | 175 | 105 | 120 | 75 |
| MY-C35-PB | | 240 | 132 | 135 | 95 |
| MY-C50-PB | | 275 | 158 | 152 | 120 |